


Zero-IF SAW Filter

Zero-IF SAW Filter

330MHz~900MHz

Multi-size

Package: SMD /DIP

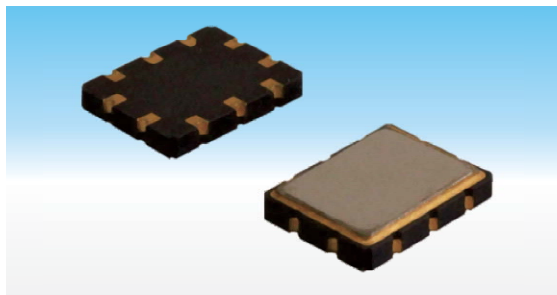

Features

- Low-loss SAW component
- Low amplitude ripple
- Electrostatic Sensitive Device (ESD)
- Multiple specification and multi-size
- Frequencies from 330MHz to 900MHz
- Applications: Medical, Wireless communication, Cellular phone, Repeater, LTE, Pager, STB, Base station, etc.
- RoHS Compliant /Pb Free



Standard Specifications

Part Number	Center Frequency (MHz)	Pass Bandwidth (MHz)	Insertion Loss (dB) max.	Package Code
SF3222	337.4	12	32	QCC12
SF4176	435	12	70	QCC8C
SF4206	455.4	12	31	QCC12C
SF4010	480	18	18(3dB)	QCC8C
SF4053	480	18	18(3dB)	TO39
SF5124	512.2	12	30	QCC12C
SF5126	514.25	13	28	QCC12C
SF6115	690.5	30	6.8	QCC12C
SF7132	720	17	126(3dB)	QCC8C
SF7134	720	12	1.5	QCC12C
SF7135	720	11	2	QCC12C
SF7136	720	11	3	QCC12C
SF7137	720	13	8	QCC12C
SF8133	899	33	24.00(3dB)	QCC12

Note: More frequencies, more information, please contact with our sales department directly