


High-precision SMD VC-TCXO/TCXO

DSA1612SDN/DSA211SDN/DSA221SDN/DSA321SDN

DSB1612SDN/DSB211SDN/DSB221SDN/DSB321SDN/DSB1612SDNB/DSB211SDNB/DSB221SDNB/DSB321SDNB

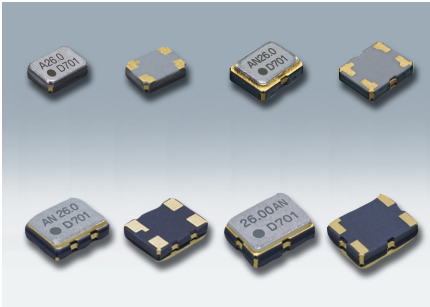


Actual size DSA1612SDN □ DSA211SDN □
DSA221SDN □ DSA321SDN □

Features

- Low voltage operation
- Low phase noise
- Single package structure
- Moisture prevention packing is unnecessary.
Moisture Sensitivity Level : LEVEL 1
(IPC/JEDEC J-STD-033)

Applications

- Mobile phones
- GPS/GNSS and Industrial radio communications



[Type]

VC-TCXO	TCXO	TCXO(Stand-by Function)	Size
DSA1612SDN	DSB1612SDN	DSB1612SDNB	1612 size
DSA211SDN	DSB211SDN	DSB211SDNB	2016 size
DSA221SDN	DSB221SDN	DSB221SDNB	2520 size
DSA321SDN	DSB321SDN	DSB321SDNB	3225 size

Standard Specification

Type Item		VC-TCXO				TCXO							
		DSA1612SDN	DSA211SDN	DSA221SDN	DSA321SDN	DSB1612SDN	DSB211SDN	DSB221SDN	DSB321SDN	DSB1612SDNB (Stand-by Function)	DSB211SDNB (Stand-by Function)	DSB221SDNB (Stand-by Function)	DSB321SDNB (Stand-by Function)
Frequency Range	16 to 60MHz		12.288 to 52MHz		9.6 to 52MHz		16 to 60MHz		12.288 to 52MHz		9.6 to 52MHz		
Standard Frequency	19.2MHz/26MHz/38.4MHz/40MHz/52MHz						16.3676MHz/ 16.367667MHz/ 16.368MHz/ 16.369MHz/ 16.8MHz/26MHz/33.6MHz						
Supply Voltage Range	+1.68 to +3.5V												
Supply Voltage(Vcc)	+1.8V/+2.6V/+2.8V/+3.0V/+3.3V												
Current Consumption	+1.5mA max. (f≤26MHz)/+2.0mA max. (26<f≤52MHz)/+2.5mA max. (f≤60MHz)												
Stand-by Current	—									+3μA max.			
Output Level	0.8Vp-p min. (f≤52MHz) (Clipped Sinewave/DC-coupled)												
Output Load	10kΩ//10pF												
Frequency Stability Tolerance	±1.5×10 ⁻⁶ max. (After 2 reflows)												
vs. Temperature	±1.0×10 ⁻⁶ ,±2.5×10 ⁻⁶ max./-30 to +85℃ ±1.0×10 ⁻⁶ ,±2.5×10 ⁻⁶ max./-40 to +85℃(Option)						±0.5×10 ⁻⁶ ,±2.5×10 ⁻⁶ max./-30 to +85℃ ±0.5×10 ⁻⁶ ,±2.5×10 ⁻⁶ max./-40 to +85℃(Option)						
vs. Supply Voltage	±0.2×10 ⁻⁶ max. (Vcc ±5%)												
vs. Load Variation	±0.2×10 ⁻⁶ max. (10kΩ//10pF±10%)												
vs. Aging	±1.0×10 ⁻⁶ max./year												
Frequency Control	±3.0×10 ⁻⁶ to ±5.0×10 ⁻⁶ /Vcont=+1.4V±1V @Vcc≥+2.6V						—						
Control Sensitivity	±3.0×10 ⁻⁶ to ±5.0×10 ⁻⁶ /Vcont=+0.9V±0.6V @Vcc=+1.8V												
Response Slope	Positive						—						
Start up Time	2.0ms max.												
Output Enable Time	—									2.0ms max.			
Phase Noise	[f≤26MHz]				[26MHz<f≤40MHz]				[40MHz<f≤52MHz]				
Offset 100Hz	-115dBc/Hz				-110dBc/Hz				-105dBc/Hz				
Offset 1kHz	-130dBc/Hz				-130dBc/Hz				-125dBc/Hz				
Offset 10kHz	-150dBc/Hz				-150dBc/Hz				-145dBc/Hz				
Offset 100kHz	-155dBc/Hz				-155dBc/Hz				-150dBc/Hz				
Packing Unit	DSA1612SDN/DSA211SDN/DSA221SDN, DSB1612SDN/DSB211SDN/DSB221SDN, DSB1612SDNB/DSB211SDNB/DSB221SDNB: 3000pcs./reel(φ180) DSA321SDN, DSB321SDN, DSB321SDNB: 2000pcs./reel(φ180)												

Consult our sales representative for other specifications.

High-precision SMD VC-TCXO/TCXO

For Mobile communications/Industrial system/GPS/GNSS

■ Dimensions

[mm]


■ DSA1612SDN/DSB1612SDN/DSB1612SDNB

Model Code


A:VC-TCXO(DSA1612SDN)
B:TCXO(DSB1612SDN)
C:TCXO(DSB1612SDNB Stand-by Function)

Pin Connections

Pin No.	Connection
#1	Vcont(VC-TCXO)/GND(TCXO) ENABLE/DISABLE (Stand-by Function)
#2	GND
#3	Output
#4	Vcc



■ Recommended Land Pattern <Top View>

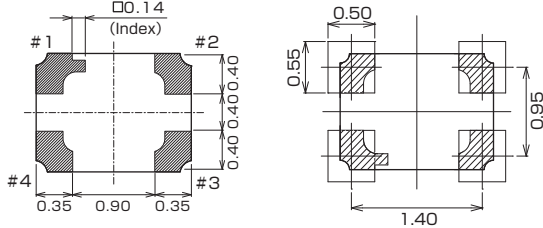


■ DSA211SDN/DSB211SDN/DSB211SDNB

Model Code


AN : VC-TCXO (DSA211SDN)
BN : TCXO (DSB211SDN)
CN : TCXO (DSB211SDNB Stand-by Function)

Pin Connections

Pin No.	Connection
#1	Vcont(VC-TCXO)/GND(TCXO) ENABLE/DISABLE (Stand-by Function)
#2	GND
#3	Output
#4	Vcc



■ Recommended Land Pattern <Top View>

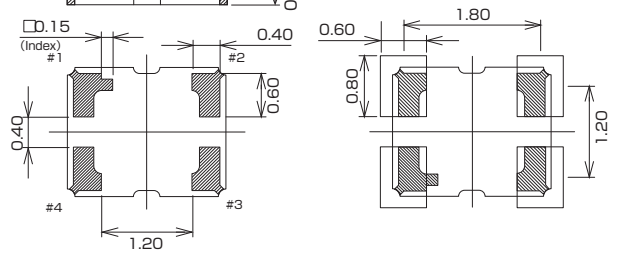


■ DSA221SDN/DSB221SDN/DSB221SDNB

Model Code


AN : VC-TCXO (DSA221SDN)
BN : TCXO (DSB221SDN)
CN : TCXO (DSB221SDNB Stand-by Function)

Pin Connections

Pin No.	Connection
#1	Vcont(VC-TCXO)/GND(TCXO) ENABLE/DISABLE (Stand-by Function)
#2	GND
#3	Output
#4	Vcc



■ Recommended Land Pattern <Top View>

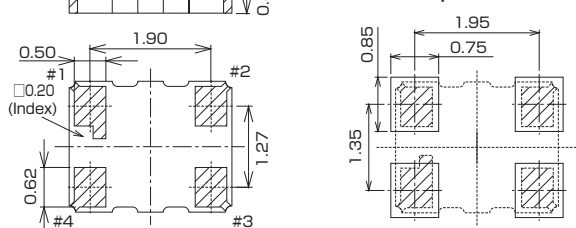


■ DSA321SDN/DSB321SDN/DSB321SDNB

Model Code

AN : VC-TCXO (DSA321SDN)
BN : TCXO (DSB321SDN)
CN : TCXO (DSB321SDNB Stand-by Function)

Pin Connections

Pin No.	Connection
#1	Vcont(VC-TCXO)/GND(TCXO) ENABLE/DISABLE (Stand-by Function)
#2	GND
#3	Output
#4	Vcc

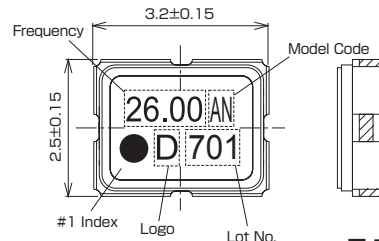

■ Recommended Land Pattern <Top View>

